

2739C 16:9 PCAP

Open Frame Touch Monitor



Features

- + Metal shell, open frame design
- + Flat and zero bezel appearance
- + Commercial grade LCD, LED backligh
- + Resolution 1920X1080FHD@60Hz
- + High contrast full viewing Angle
- + Supports vertical and horizontal screen
- + 10 point projection capacitive touchscreen
- + Cover plate anti riot and anti fingerprint
- + Video interface: HDMI+VGA
- + Removable OSD remote for easy use
- + Multiple assembly holes on the side and back
- + Support OS: Windows/Android/Linux
- + 3-Years Warranty




Optional

- No Touch
- Private Filter
- AG Coating
- Touch interface:RS232
- Video interface: Display Port

TDS2739C Open-Frame Touchscreen Specifications

Model	2739C
Color	Black/Silver
Diagonal	27"
Aspect Ratio	16:9
Active Area	597.6X336.15 (mm)
Dimensions	644.2X388.4X 44.1(mm)
Resolution	1920X1080 FHD@ 60Hz
Viewing Angle	Horizontal: 89° /89°; Vertical: 89° /89°
Number of Colors	16.7m
Brightness	LCD panel : 300nits; PCAP : 275 nits
Contrast Ratio	3000:1
Response Time	14ms
Touch Technology	PCAP (Projected Capacitive) - 10 Touch
Input method	Finger, Capacitance pen(Standard) Latex gloves touch (pre commissioning required)
Transmittance	≥90%
Surface hardness	7H(Mohs)
Touch Interface	USB 2.0
Video Interface	HDMI+VGA
Input Voltage	AC: 100-240 VAC,50/60 Hz
Sealability	Touchscreen sealed to bezel
Drop test	1kg steel ball falls from 1.2m without breaking
Weight (Net)	8KG
Shipping Dimensions	720X 465X135(mm)
Operating temperature	0°C-40°C
Storage temperature	-20°C- 60°C
Humidity	Operating: 20% to 70%; Storage: 10% to 80%
Mounting Options	VESA Hole on the back: 100mm&200 mm Four sides has a set of fixing holes: 65mm
MTBF	30,000 Hours
Power Supply	12V5A
Warranty	3-Years
Agency Approvals	FCC; CE; ROHS
Support OS	Windows/Android/Linux
What's in the Box	1*USB cable,1*HDMI cable,1*DC cable,1*RJ45 OSD Remote (Standard) L" (Side Mount) Brackets and w/Screws (Options)

TDS2739C-PCAP

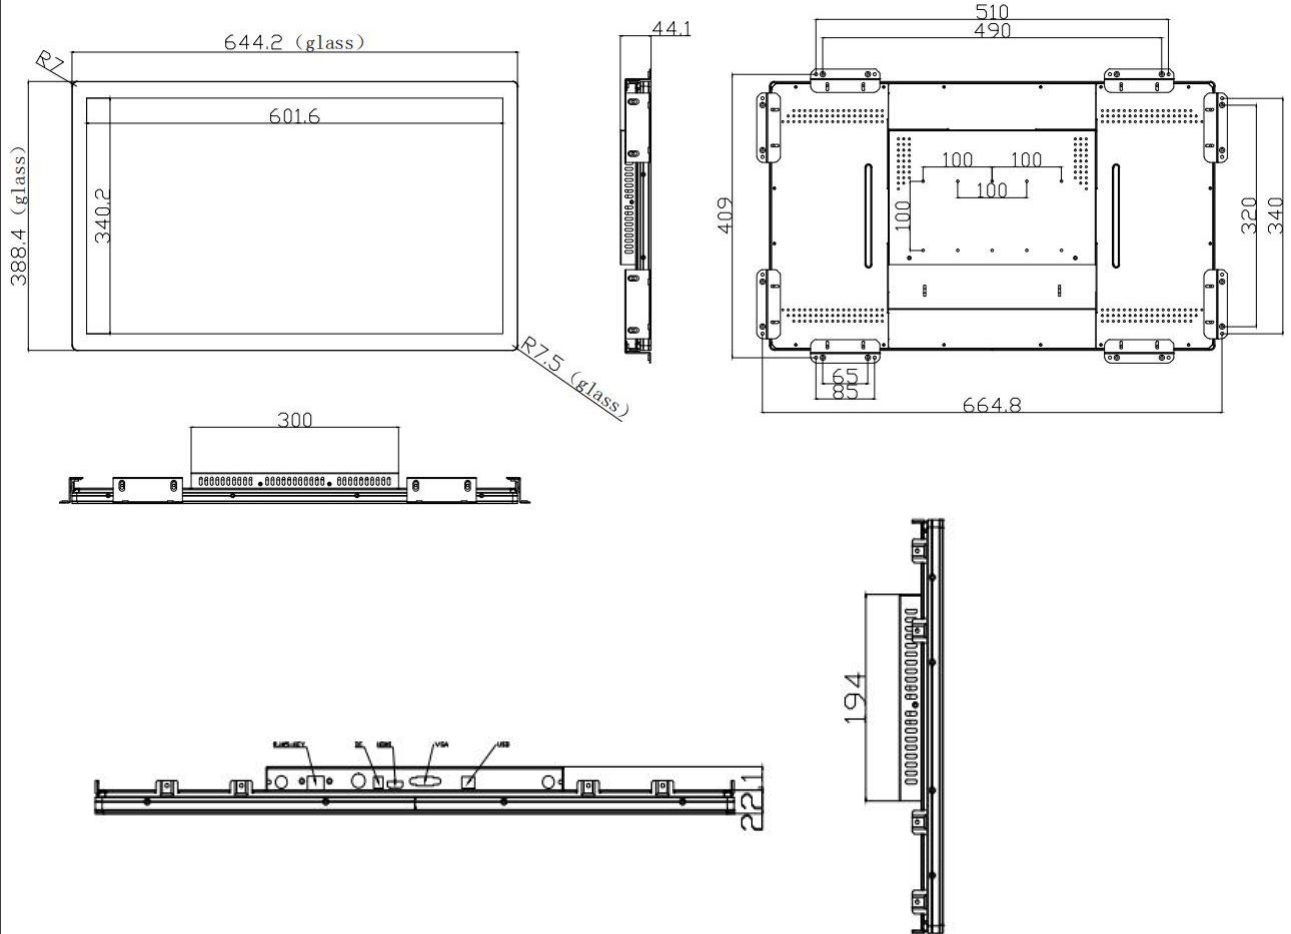

Dimensions are in millimeters

