

3202H 16:9 PCAP

High Brightness Touchscreen



Features

- + Flat appearance design
- + Metal shell, ultra-thin shape
- + IP55 level front panel waterproof
- + Industrial grade LCD, LED backlight
- + Resolution 1920X1080FHD@60Hz
- + 1500nits brightness backlight
- + Sunlight adaptive adjustment module
- + 10-Point projection capacitive touchscreen
- + Cover plate anti riot and anti-glare coating
- + Built-in intelligent temperature control system
- + Support horizontal and vertical screen
- + Video interface: HDMI+VGA
- + Anti-theft Wall Mount Bracket
- + Support OS: Windows/Android/Linux
- + 2-year Warranty

Optional:

- No Touch
- 5mm glass
- Anti-infrared + anti-ultraviolet protection
- Anti-LCD screen water mist process
- Video interface: Display Port





TDS3202H High Brightness Touchscreen Monitor

Diagonal	32"(16:9)
Color	Black
Active Area	699.4X393.3(mm)
Dimensions	762X467.5X92.7(mm)
Resolution	1920X1080FHD@60Hz
Viewing Angle	Horizontal: 89° /89°; Vertical: 89° /89°
Number of Colors	16.7M
Brightness	LCD panel : 1500nits; PCAP : 1275nits
Brightness adjustment mode	*The brighter the ambient light, the brighter the LCD screen *The darker the ambient light, the darker the LCD screen, and enter the power saving mode
Contrast Ratio	1400:1
Response Time	12ms
Touch Technology	PCAP (Projected Capacitive) - 10 Touch
Mode of touch	Fingers/ silicone pens
Glass thickness	3mm, tempered, surface AG+AF coating
Glass hardness	7H(MOHS)
Touch Accuracy	≤2mm
Touch Interface	USB 2.0
Video Interface	HDMI+VGA
Input Voltage	AC:100-240 VAC, 50/60 Hz
Power type	built-in power supply
Waterproof	Front panel :Front frame touch screen sealed to bezel Back: rain-proof hole design, can withstand rainwater falling vertically
Explosion-proof	450 grams of steel ball height 1.2 meters vertical drop center point will not break
Temperature control	When the operating temperature reaches 40°C, the cooling fan starts.When the temperature is below 40°C , stop it.
Weight(net)	16.35KG
Temperature	Operating: -5°C-50°C; Storage: -10°C-80°C
Humidity	Operating: 20%-70%; Storage: 10%-80%
MTBF	50,000 Hours
VESA Mounting	400X200(mm)
Warranty	2-Year
Agency Approvals	FCC; CE; ROHS
Support OS	Windows/Linux\Android
What's in the Box	1*USB cable, 1*HDMI cable, 1*AC cable

Warning: When wall-mounted, please keep the heat dissipation distance between the back heat dissipation hole and the wall at least 50mm, and the heat dissipation hole cannot be blocked. Keep the product in a ventilated state.

Autodesk

Rev	Date	Content	Approved
V1			

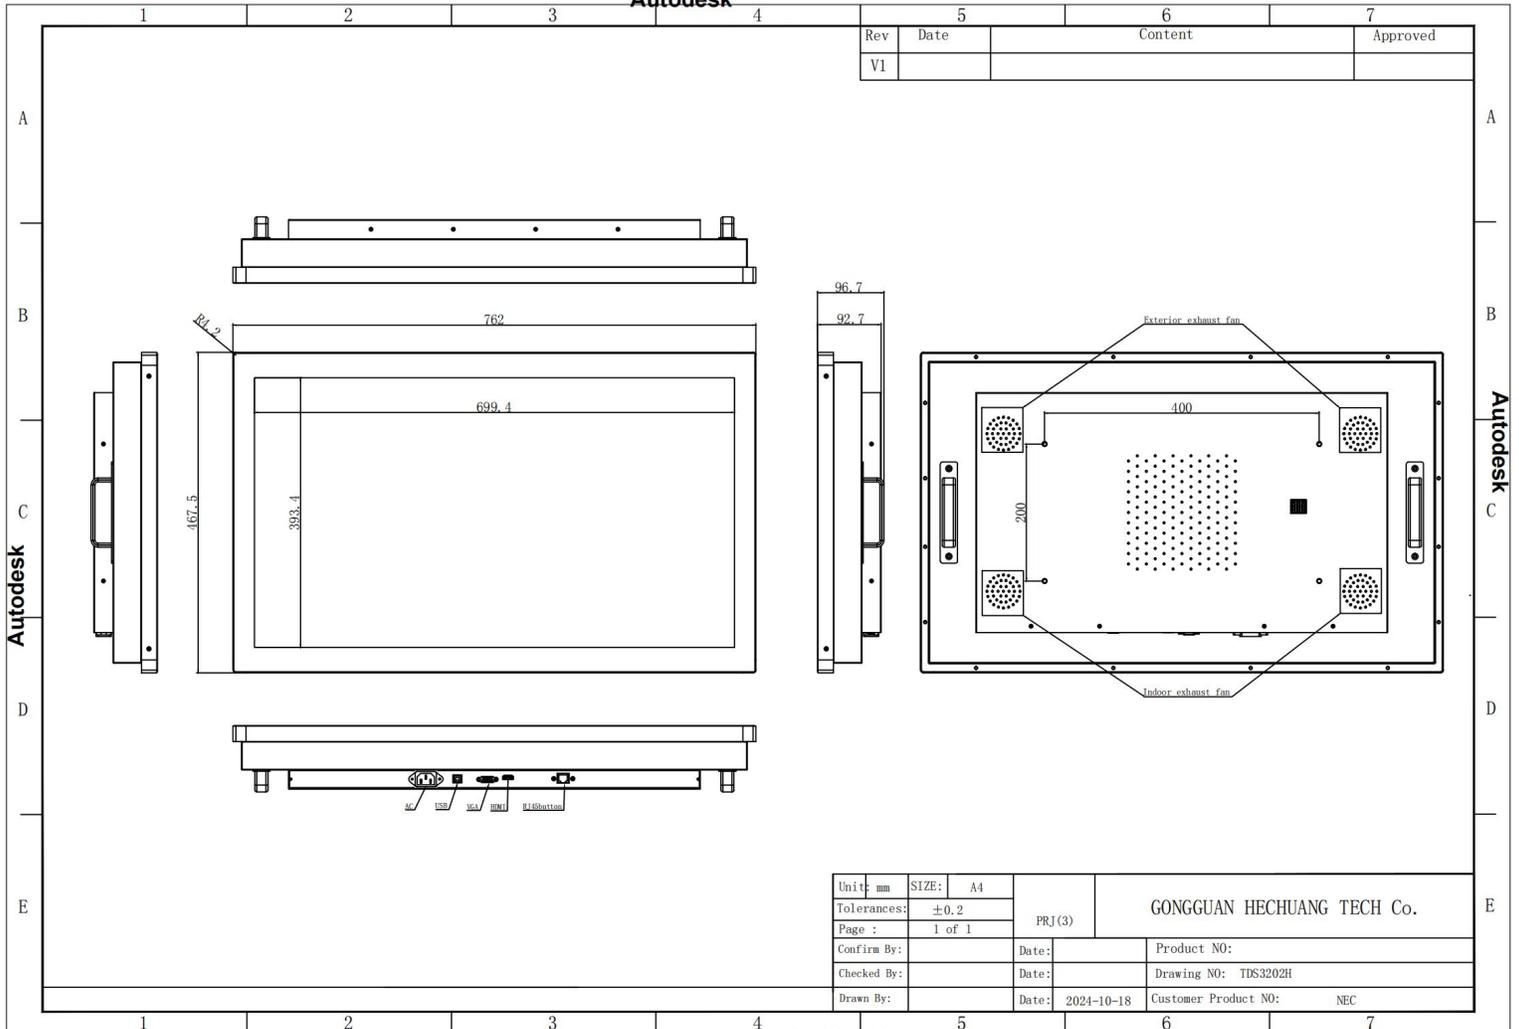

Unit: mm	SIZE: A4	PRJ(3)	GONGGUAN HECHUANG TECH Co.	
Tolerances: ±0.2	Page : 1 of 1		Confirm By:	Date:
Checked By:	Drawn By:	Date:	2024-10-18	Drawing NO: TDS3202H
				Customer Product NO: NEC

Autodesk