

1502C 16:9 PCAP

Desktop Touchscreen Monitor



Features

- + Flat appearance design
- + Metal shell, ultra-thin shape
- + Commercial grade LCD, LED backlight
- + Resolution 1920X1080FHD@60Hz
- + 300nits brightness, full viewing angle, rich colors
- + 10-touch projective capacitive touchscreen
- + Smooth touch, great interactive experience
- + Anti-palm accidental touch function
- + Video interface: HDMI+VGA
- + Stable base with adjustable angle
- + Back VES wall mounting : 75mmX75mm
- + Support OS: Windows/Android/Linux
- + 2-Year Warranty




Optional:

- No Touch
- Private Filter
- AG Coating
- Video interface: Display Port
- All-in-one (Windows/Android)

TDS1502C Desktop Touchscreen Monitor Specification

Model	1502C
Diagonal	15.6
Color	Sliver/Black
Aspect Ratio	16:9
Active Area	344.16X193.59(mm)
Dimensions	394.5X242X36.8(mm)(Does not include base)
Resolution	1920X1080 (FHD)@60Hz
Viewing Angle	Horizontal: 85° /85°;Vertical: 85° /85°
Brightness	LCD panel : 300nits; PCAP : 275 nits
Number of Colors	262K , 72% NTSC
Contrast Ratio	800:1
Response Time	25ms
Touch technology	PCAP (TouchPro® Projected Capacitive) - 10 Touch
Input method	Finger, Capacitance pen(Standard) Latex gloves touch (Thickness≤2mm)
Transmittance	≥90%
Surface hardness	7H(Mohs)
Touch Interface	USB2.0
Video Interface	HDMI+VGA
Speaker	TwoX2W internal speakers
Input Voltage	AC:100-240VAC, 50/60Hz
Sealability	Touchscreen sealed to bezel
Drop Test	The 200g ball does not break when it falls from 0.8m
Weight (Unpackage)	2KG (Does not include base)
Shipping Dimensions	520X340X135(mm)
Operating Temperature	0°C-40°C
Storage Temperature	-20°C-60°C
Humidity	Operating:20%-70%; Storage: 10%-80%
MTBF	30,000 hours
Mounting Options	VESA:75X75(mm),100X100(mm)
BASE	Adjusting angle: 0°C-90°C(Optional)
Power Supply	DC:12V3A
Warranty	2-year
Agency Approvals	FCC; CE; RoHS
Support OS	Windows/Linux/Android
What's in the Box	1*USB cable,1*HDMI cable,1*DC cable

TDS1502C-PCAP

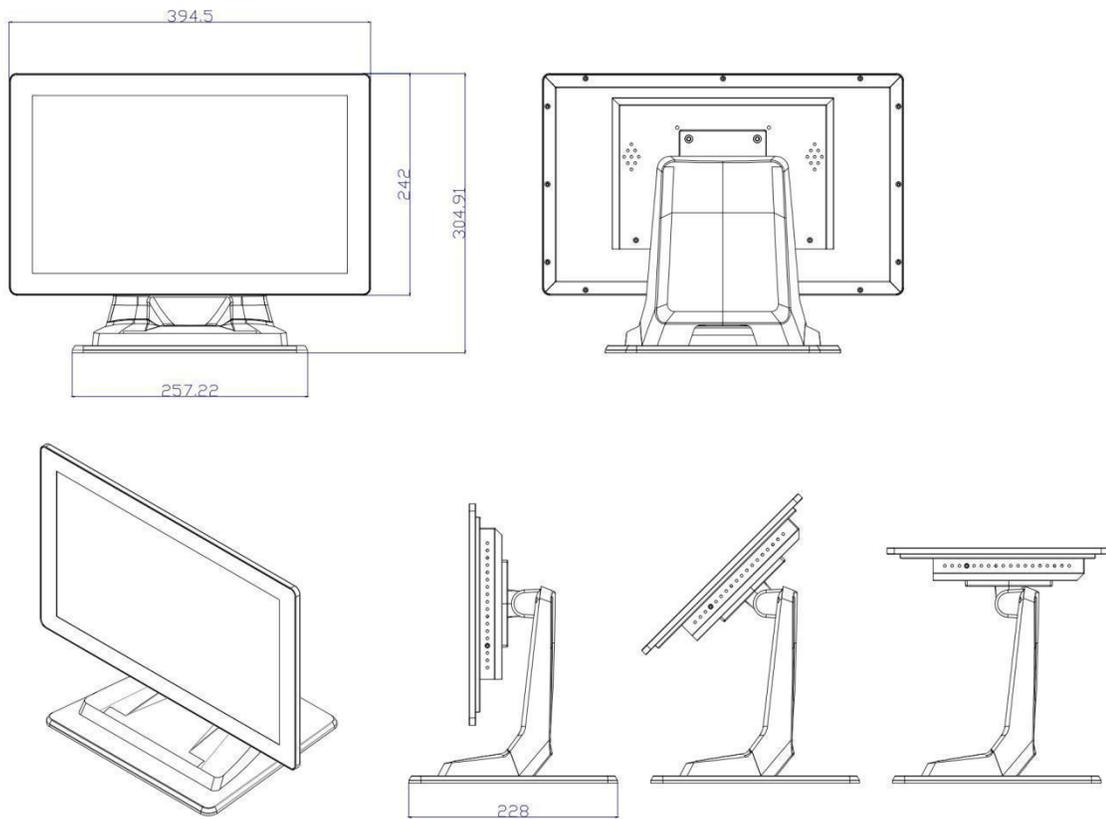

Dimensions are in millimeters

