


1502D 16:9 PCAP

Digital Signage Touch Monitor

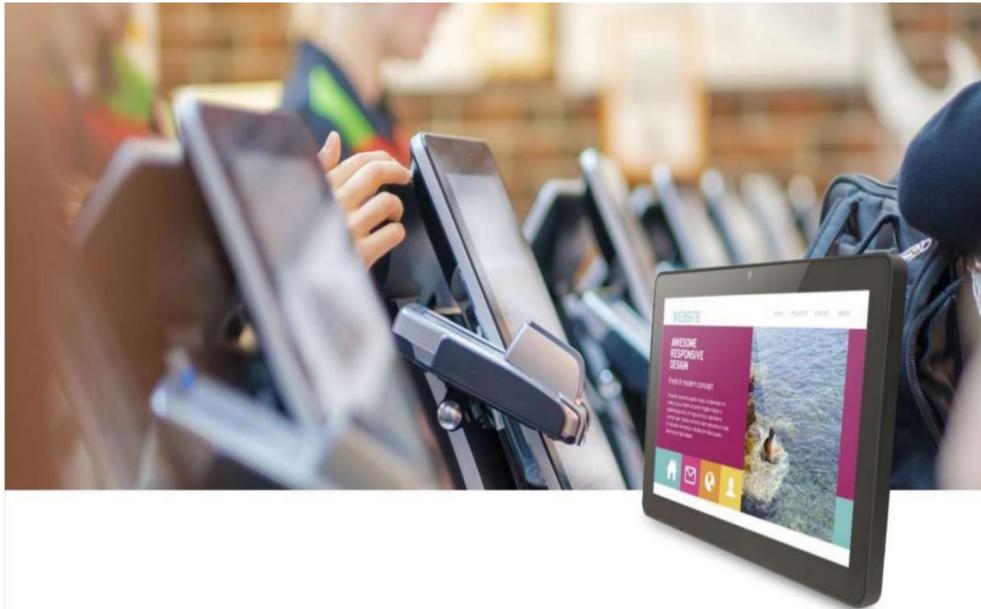

Features

- + Flat appearance design
- + Metal shell, ultra-thin shape
- + Commercial grade LCD, LED backlight
- + Resolution 1920X1080FHD@60Hz
- + 300 nits brightness, full viewing angle
- + 10-touch projection capacitive touchscreen
- + Cover plate anti riot and anti finger
- + Smooth to the touch, even with water droplets
- + Supports horizontal and vertical screen
- + Video interface: HDMI+VGA
- + Back VESA wall mounting : 100mmX75mm
- + Supports Windows/Android/Linux
- + 2-year warranty



Optional:


- No Touch
- Private Filter
- AG Coating
- Media play
- Video interface: Display Port
- ALL-IN-ONE(Android /Windows)



TDS1502D Digital Signage Touch Monitor Specification

Model	1502D
Color	Black/Silver
Diagonal	15.6"
Aspect Ratio	16:9
Active Area	344.16X193.59(mm)
Dimensions	394.5X242X36.8(mm)
Resolution	1920 X1080FHD @60Hz
Viewing Angle	Horizontal: 85° /85° Vertical: 85°/85°
Number of Colors	16.2M,72% NTSC
Brightness	LCD panel: 300cd/m2,PCAP Touch: 275cd/m2
Contrast Ratio	800:1
Response Time	30ms
Touch technology	PCAP (Projected Capacitive) -10 touch
Input method	Finger, Capacitance pen Latex gloves touch ((Thickness≤2mm)
Transmittance	≥90%
Surface hardness	6H (Mohs)
Touch interface	USB 2.0
Input Video interface	HDMI+VGA
Speaker	TwoX2W internal speakers
Input voltage	AC:100-240 VAC, 50/60 Hz
Sealability	Touchscreen sealed to bezel
Drop test	200g steel ball falls from 0.8m without breaking
Weight(Unpackage)	2KG
Shipping Dimensions	520X340X135(mm)
Operating Temperature	0°C-40°C
Storage Temperature	-20°C-60°C
Humidity	Operating: 20% to 70%; Storage: 10% to 80%
MTBF	30,000 hours
Power Supply	12V3A
VESA Mounting	75 X 75(mm), 100X100(mm)
Warranty	2-Year
Agency Approvals	FCC, CE, RoHS,CCC
Support OS	Windows/Linux\Android
What's in the Box	1*USB cable,1*HDMI cable,1*DC cable

TDS1502D-PCAP

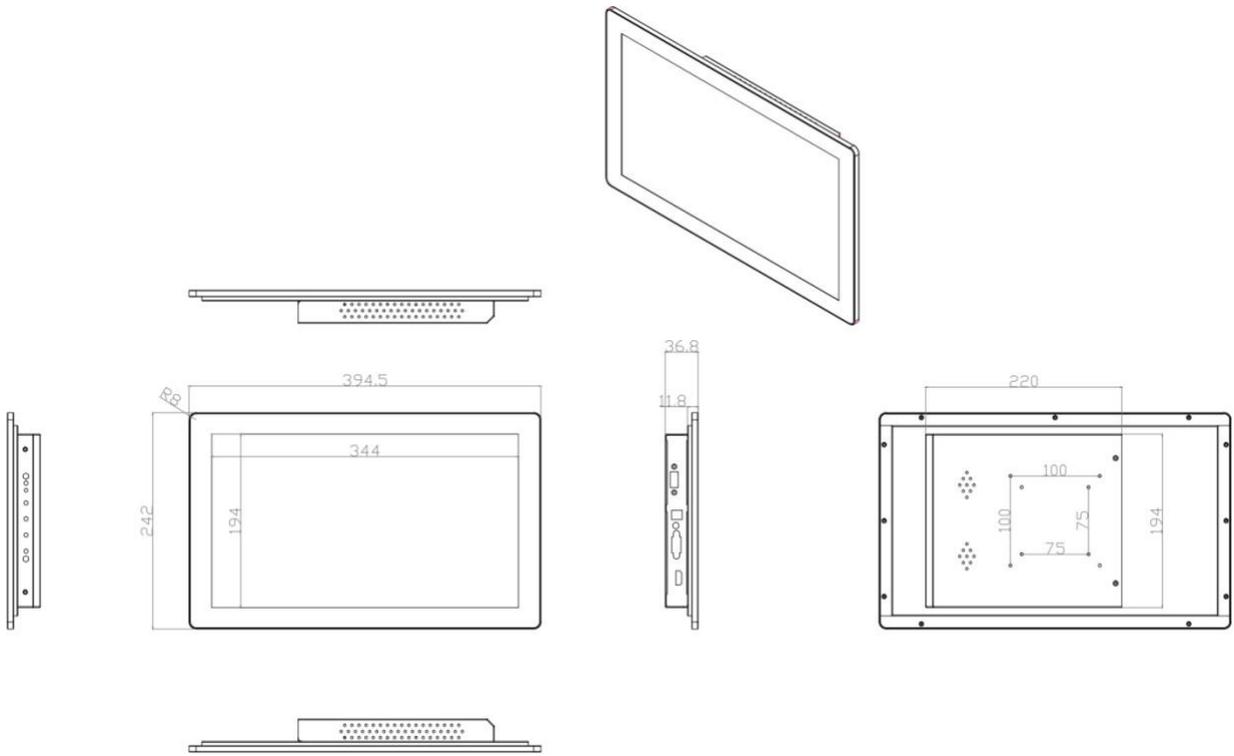

Dimensions are in millimeters

