

# 1502C 16:9 PCAP

## Desktop Touchscreen Monitor



## Features

- + Flat appearance design
- + Metal shell, ultra-thin shape
- + Commercial-grade LCD, LED backlight
- + Resolution 1920X1080FHD@60Hz
- + 300nits brightness, full viewing angle, rich colors
- + 10-touch projective capacitive touchscreen
- + Smooth touch, great interactive experience
- + Palm Rejection & Glove Touch Support
- + Video interface: HDMI+VGA
- + Stable base with adjustable angle
- + Back VES wall mounting : 75mmX75mm
- + Support OS: Windows/Android/Linux
- + 2-Year Warranty


## Optional:

- No Touch
- AG Coating
- Privacy filter
- Video interface: Display Port
- All-in-one (Windows/Android)



| TDS1502C Desktop Touchscreen Monitor Specification |                                                                   |
|----------------------------------------------------|-------------------------------------------------------------------|
| Model                                              | 1502C                                                             |
| Diagonal                                           | 15.6                                                              |
| Color                                              | Sliver/Black                                                      |
| Aspect Ratio                                       | 16:9                                                              |
| Active Area                                        | 344.16X193.59(mm)                                                 |
| Dimensions                                         | 394.5X242X35.8(mm)(Does not include base )                        |
| Resolution                                         | 1920X1080 (FHD)@60Hz                                              |
| Viewing Angle                                      | Horizontal: 85° /85°;Vertical: 85° /85°                           |
| Brightness                                         | LCD panel : 300nits; PCAP : 275 nits                              |
| Number of Colors                                   | 262K , 72% NTSC                                                   |
| Contrast Ratio                                     | 800:1                                                             |
| Response Time                                      | 25ms                                                              |
| Touch technology                                   | PCAP (TouchPro® Projected Capacitive) - 10 Touch                  |
| Input method                                       | Finger, Capacitance pen(Standard)<br>Gloves touch (Thickness≤2mm) |
| Transmittance                                      | ≥90%( with privacy filter)                                        |
| Surface hardness                                   | 6H(Mohs)                                                          |
| Touch Interface                                    | USB2.0                                                            |
| Video Interface                                    | HDMI+VGA                                                          |
| Speaker(optional)                                  | TwoX2W internal speakers                                          |
| Input Voltage                                      | AC:100-240VAC, 50/60Hz                                            |
| Sealability                                        | Touchscreen sealed to bezel                                       |
| Drop Test                                          | The 200g ball does not break when it falls from 0.8m              |
| Weight (Unpackage)                                 | 2KG (Does not include base)                                       |
| Shipping Dimensions                                | 520X340X135(mm)                                                   |
| Temperature                                        | Operating: 0°C-40°C,Storage: -20°C-60°C                           |
| Humidity                                           | Operating: 20%-70%; Storage: 10%-80%                              |
| MTBF                                               | 30,000 hours                                                      |
| Mounting Options                                   | VESA:75X75(mm),100X100(mm)                                        |
| BASE(Optional)                                     | Adjusting angle: 0°C-90°C                                         |
| Power Supply                                       | DC:12V3A                                                          |
| Warranty                                           | 2-year                                                            |
| Agency Approvals                                   | FCC; CE; RoHS                                                     |
| Support OS                                         | Windows/Linux/Android                                             |
| What's in the Box                                  | 1*USB cable,1*HDMI cable,1*DC cable                               |

## TDS1502C-PCAP

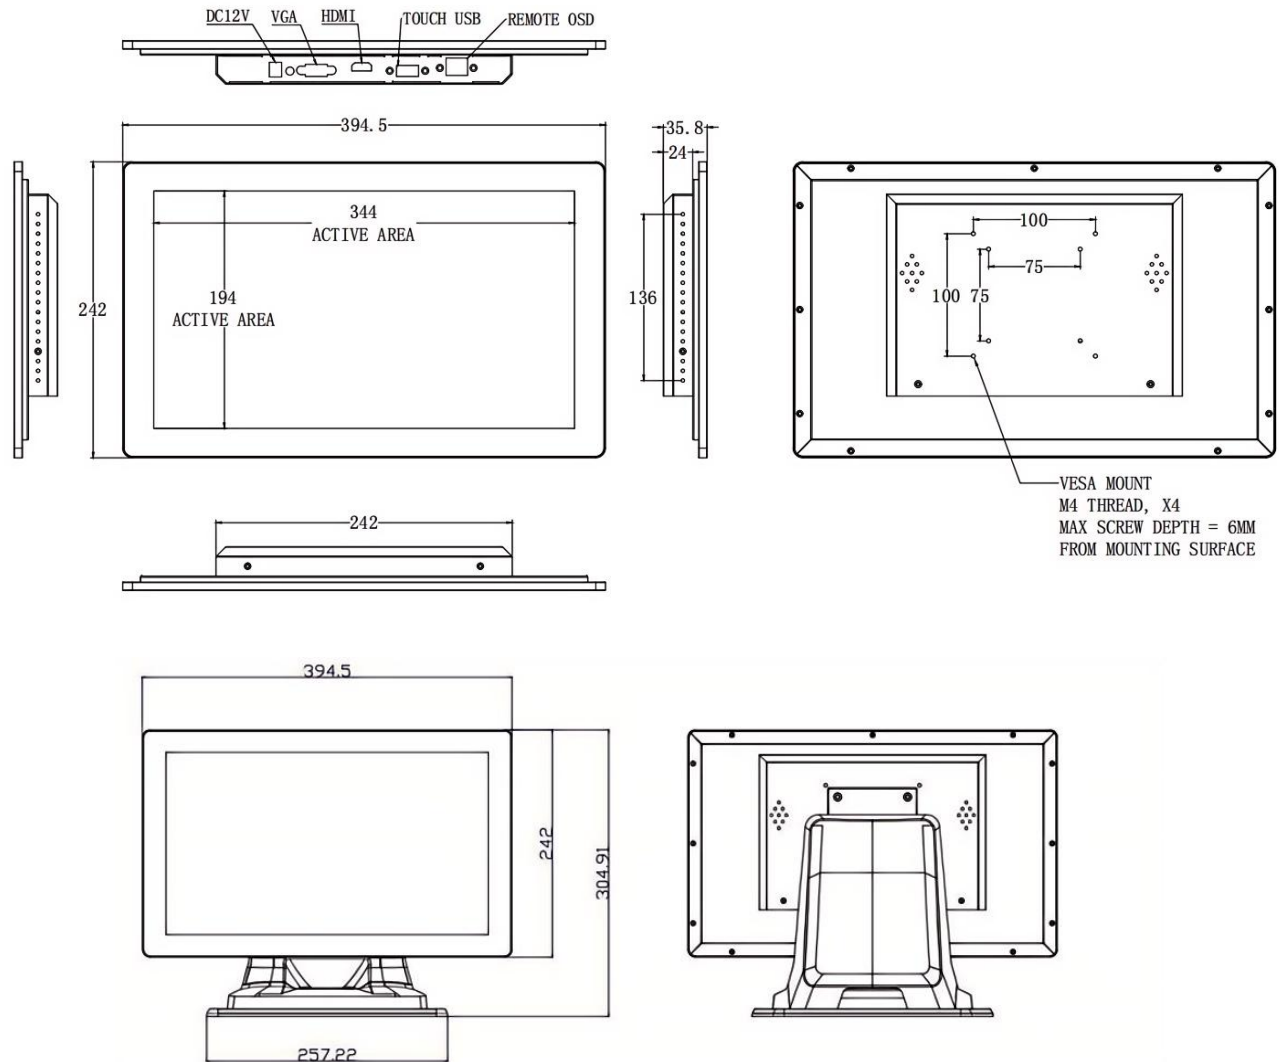

Dimensions are in millimeters

