


2738C 16:9 PCAP

Open-Frame Touchscreen

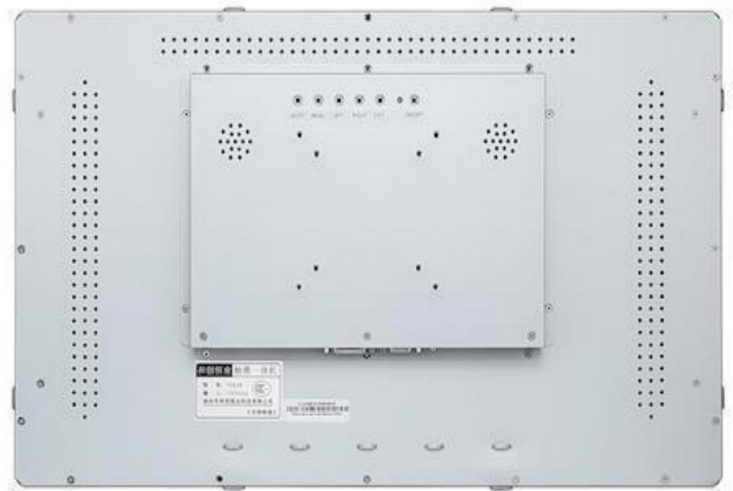


Feature:

- +Metal shell, flat, open frame structure
- +The step frame is easy to assemble
- +Commercial grade LCD, LED backlight
- +Resolution 1920X1080 FHD@60Hz
- +Wide Viewing Angle, High Brightness
- +10-point projection capacitive touchscreen
- +3mm Tempered Glass, Anti-Fingerprint Coating
- +Supports Palm Rejection & Glove Touch
- +Video interface: HDMI+VGA
- +Multiple assembly holes on the side and back
- +Support OS: Windows/Android/Linux
- +3-Year warranty




Optional:

- No Touch
- Privacy Filter
- AG Coating
- Video interface: Display Port

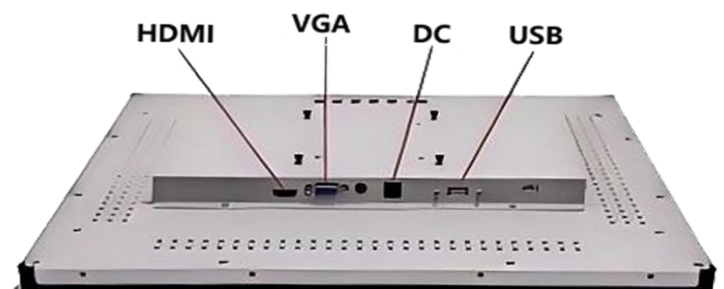

TDS2738C Open-Frame Touchscreen Specifications	
Model	2738C
Color	Black/Silver
Diagonal	27’’
Aspect Ratio	16:9
Active Area	596.736X335.664(mm)
Dimensions	662.6X400.6X52(mm) Cabinet Opening: 650X388(mm)
Resolution	1920X1080 FHD @ 60Hz
Viewing Angle	Horizontal: 89° /89°; Vertical: 89° /89°
Number of Colors	16.7M
Brightness (typical)	LCD panel : 300 nits; PCAP Touch: 275 nits
Response Time	5ms
Contrast Ratio	3000:1
Touch Technology	PCAP (Projected Capacitive) - 10 Touch
Input method	Finger, Capacitance pen(Standard) Gloves touch (Thickness $\leq$ 2mm)
Transmittance	$\geq$ 90%
Surface hardness	7H(Mohs)
Touch Interface	USB 2.0
Video Interface	HDMI +VGA
Input Voltage	AC: 100-240 VAC,50/60 Hz
Sealability	Touchscreen sealed to bezel
Drop Test	450g steel ball falls from 1.2m without breaking
Weight (Unpackage)	8KG
Shipping Dimensions	770X510X160(mm)
Temperature	Operating: 0°C to 40°C; Storage: -20° C to 60° C
Humidity	Operating: 20% to 70%; Storage: 10% to 80%
Mounting Options	Back VESA two groups of holes: 75mm&100mm Four sides has a set of fixing holes: 200mm
MTBF	30,000 hours demonstrated
Power Supply	DC:12V5A
Warranty	3-year
Agency Approvals	FCC, CE, ROHS
Support OS	Windows/Linux\Android
What's in the Box	1*USB cable, 1*HDMI cable, 1*DC cable (Standard) L’’ (Side Mount) Brackets and w/Screws (Options)

TDS2738C-PCAP

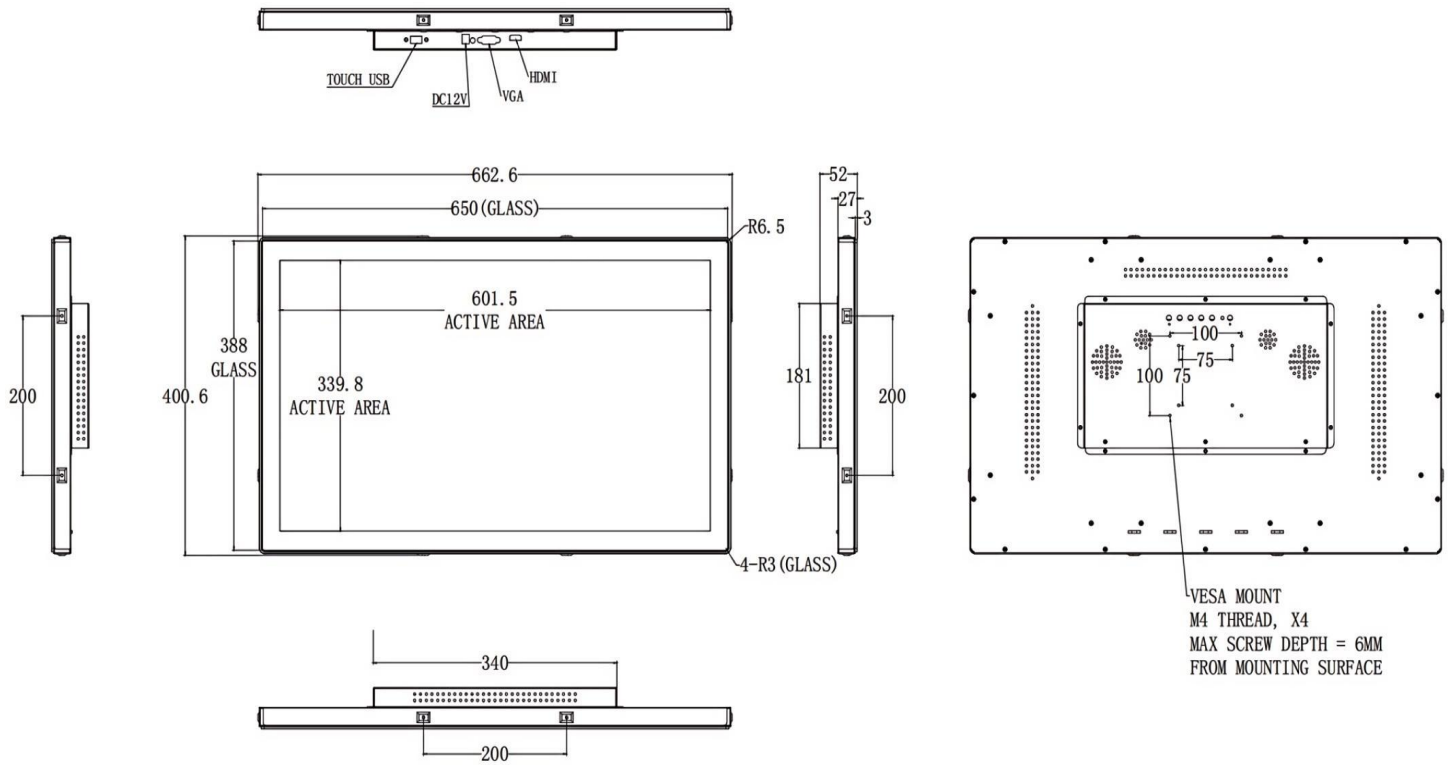

Dimensions are in millimeters

